
Snapshots from EIB-CAD


The application are developed for AutoCAD 2000(LT),2002(LT) and the menu language are English. The application has several functions such as associated attributes (physical address, order no, placement, description etc.), possibility to extract data for calculation, order, and programming. Each component has hyperlinks to more information. More detailed product specification will be available later.



Standard toolbar

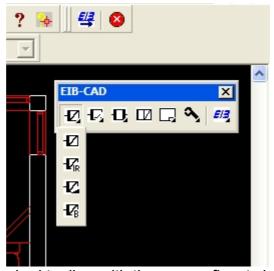

Standard toolbar with the sensor flyout visible

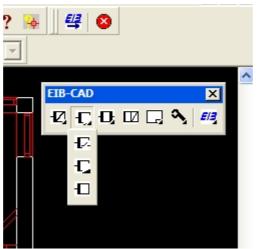


Standard toolbar with the aktuator flyout visible


	Edit Attributes		<u>?</u> ×
	Block name: EIBA029B		
<u>↓</u>	Physical adress (Area-line-device)	1111	
1.1.1	Placement (room)	Office 0102	
	Placement	+1000 o.f.	
	Device number	00001	
	Device discription	Generic actuator	
	Topology: Building	Main building	
	Note 1	Should be surface mounted	
	Note 2	Parametrized as switching	
	OK Cancel	Previous Next Help	

The "edit data-tags" dialog in which the properties can be edited. This info is exported with the data-extraction for calculation, order and programming etc.

	Edit Attributes	<u>?×</u>
	Block name: EIBA029B	
₩	Note 2	Parametrized as switching
1.1.1	Group Adresses	1/1/1, 1/ 2/1, 2/3/4
	Manufacturer	Siemens
	Order number	E17 340 34
	Topology: Building part	First floor
	Topology: Room/board	Office 0102
	Medium type	TP
	ID_NR	000001
	OK Cancel F	Previous Next Help

Page two of the "edit data-tags" dialog

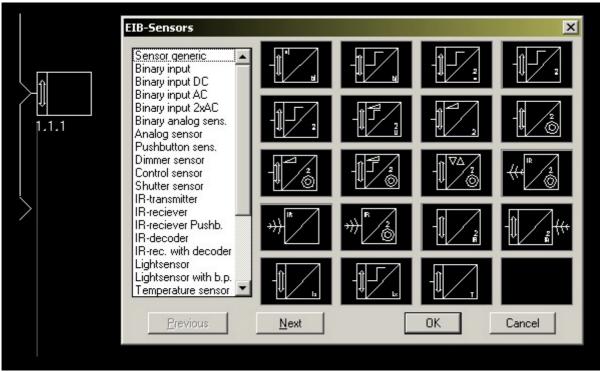



Lom	Component specification	cation												
Phys.	Placement			Device			Group				Topology:	Topology:	Medium	
Adr.		Placement Device nr. descr.	t Device n	r. descr.	Note 1	Note 2	adresses	Manufacturer Order	Order nr	Topology	r nr Topology buildingpart	Room/board type ID nr.	type	ID nr.
8	8	~		Generic	Should be	Parametrized	1/1/1,							
<u> </u>	Office 0102	+1000 o.f.	00001	actuator	surface	as switching	1/2/1	Siemens	E17 340 34	E17 340 34 Main building First floor	First floor	Office 0102 TP	ΤP	000001
					mounted	•	2/3/4							
				Conorio	Should be	Doromotrizod	1/1/1							
1	Office 0104	+1000 o.f.	00002	Cellelle	surface		1/2/2	Siemens	E17 340 34	E17 340 34 Main building First floor	First floor	Office 0104	ΤP	000002
				actuator	mounted	_	2/3/5							
				Conorio	Should be	Doromotrizod	1/1/1							
ω	Office 0106	+1000 o.f.	00003	Conone	surface		1/2/2	Siemens	E17 340 34	E17 340 34 Main building First floor	First floor	Office 0106	ΤP	000003
				actuator	mounted	9	2/3/6							
				Doposio	Should be	Domotritod	1/1/1							
4	0ffine 0108	+1000 o f	00004	CHINNE	auchuro	Faramentzeu	102	Siemene	F17 340 34	E17 340 34 Main huilding First floor	Firet floor	0ffire 0108	TP	
4		1000 0.1.	10000	actuator	mounted	as switching	2/3/7	Cicinciio		Burning main	i not nooi			10000
				Coporio	Should be	Dopportition	1/1/1							
σī	Office 0110	+1000 o.f.	00005	Cellelle	surface		1/2/3	Siemens	E17 340 34	E17 340 34 Main building First floor	First floor	Office 0110	ΤP	000005
				actuator	mounted	Building co	2/3/8							

Exported data for calculation, order and programming